


DATASHEET

Thermal Protector SXO

Type series XO

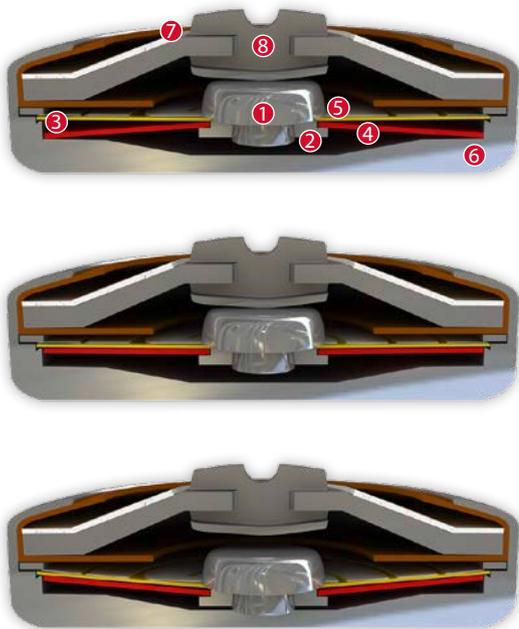

Construction and function

Switchgear consisting of a movable silver contact (1), a contact bearing pin (2), a spring snap-in disc (3), a bimetallic disc (4) and a contact tongue (5) which is riveted into one another, undetachable and fixed in a positive lock and self-aligning between a conductive, heat transferring housing (6) and a contact cap (7) made of steel that is insulated from it, plus a stationary countercontact (8). At the same time, the switchgear is supported by the contact tongue (5) acting as a transfer element for electric current which is held between a supporting collar and a circumferential ring. As such, the switchgear underlying it, that is also stuck out from the movable contact (1), can continuously work (exposed) by mechanical loads without the contact pressure defined by the spring snap-in disc (3) diminishing. As soon as the bimetallic disc (4) reaches its rated switching temperature, it effectively springs against the throw force of the spring snap-in disc (3) into its inverted position. The contact is abruptly opened. The temperature will now fall. The bimetallic disc (4) will only snap back upon reaching a defined spring back temperature and the contact is abruptly closed again.




Features:

Excellent long term performance	due to instantaneous switching, fine-silver contacts, constant contact resistance and to electrically as well as mechanically unstressed bimetallic disc, reproducible switching temperature values
Very short bouncing times	< 1 ms
Instantaneous switching	with always constant contact pressure up to the nominal switching point, resulting in low contact stress
Temperature resistance	by use of high temperature resistant materials and components

SXO

Type: Normally closed; resets automatically; with connector cables; with epoxy; insulation: Mylar®-Nomex®



Installation height h	from 8,0 mm
Diameter d	18,0 mm
Length of the insulation cap l	35,0 mm

Nominal switching temperature (NST) in 5 °C increments	70 °C - 180 °C	
Tolerance (standard)	±10 K	
Reverse switch temperature (RST) below NST (defined RST is possible at the customer's request)	UL	≥ 35 °C
	VDE	≥ 35 °C
Installation height	from 8,0 mm	
Diameter	18,0 mm	
Length of the insulation cap	35,0 mm	
Resistance to impregnation *	suitable	
Suitable for installation in protection class	I + II	
Pressure resistance to the switch housing *	600 N	
Standard connection	Lead wire 1,75 mm ² / AWG14	
Available approvals (please state)	IEC; VDE; UL; CQC	
Operating voltage range AC/DC	up until 500 V AC / 14 V DC	
Rated voltage AC	250 V	
Rated current AC	25 A	
Max. switching current AC cos φ = 1.0/cycles	50 A / 10.000	
Max. switching current AC cos φ = 1.0/cycles	63 A / 3.000	
Rated voltage DC	12 V	
Max. switching current DC/cycles	63 A / 10.000	
High voltage resistance	2,0 kV	
Total bounce time	< 1 ms	
Contact resistance (according to MIL-STD. R5757)	≤ 5 mΩ	
Vibration resistance at 10 ... 60 Hz	100 m/s ²	

Ordering example:

SXO - 125. 10 0100 / 0100

Type / version _____

NST [°C] _____

Tolerance [K] _____

Lead lengths [mm] _____ L₁ L₂

Marking example:

 **thermik**

Trade mark _____ **SXO**

Type / version _____

NST [°C] . Tolerance [K] — **125.10**

More varieties of the type series SXO:

- CXO – with connector cables; with epoxy; without insulation

www.thermik.de/data/CXO

*In accordance with the Thermik test - Specifications relating to part applications (on the part of the buyer) which deviate from our standards are not checked for their capacity to support an application and/or conformity with standards. The responsibility for testing the suitability of Thermik products for such applications falls upon the user. - Slight deviations are possible in terms of dimensions/ values, depending on the embodiment of the product. - We reserve the right to make technical changes in the course of further development. - Details concerning certain data, measurement methods, applications, approvals, etc. can be supplied upon request.